



IP68

IK08

24V

5
YR
WARRANTY

TW

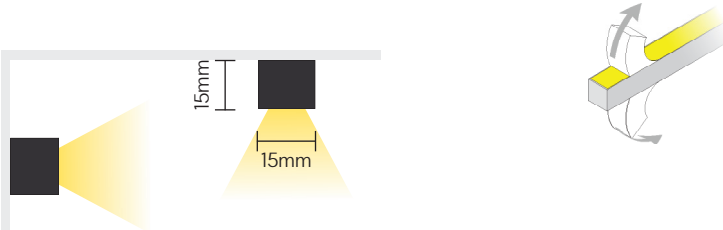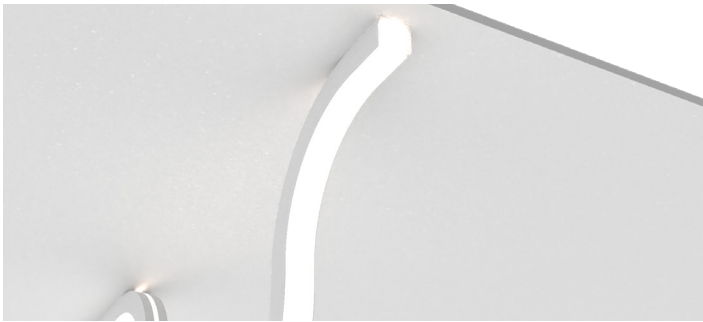

Key Features

- Bend Direction:** Vertical
- Minium Bend Diameter:** 150mm
- Protection:** IP67
- Warranty:** 5 Years
- CCT:** Tunable White (2700K-6500K), RGBW
- Controls:** Non Dimming, DALI Dimming, Switch Dim, Casambi
- Power Supply:** Remote Driver
- Power Length:** 600mm
- Wattage:** 10W/m, 12W/m
- Finish Colour:** White Jacket
- Power Entry:** Direct Entry, Side Entry Left or Right, Bottom Entry
- Installation Type:** Surface Mounted
- Input Voltage:** 24V

* MOQ Required

Technical Information

	Wattage (W/m)	Lumens (Lm/m)	Max Run Length (m)	Incremental Order Length (mm)
Tunable White	10	500-550	5	62.50
RGBW (3000K)	12	RGBW: 250	5	62.50

If this fitting needs to be adjusted on site, contact FOS Lighting before cutting the product.

Accessories

Standard

Flexible

Code		Example: VVB1515-S-10-TW-DE-TW-5000								
Code	Mounting	Power		CCT		Connector		Driver		Length
VVB1515	Accessory	10	10 W/m	TW	2700-6500K	DE SL SR BE	Direct Entry Side Entry Left Side Entry Right Bottom Entry	D4 C4 TW	DALI RGBW Casambi RGB,RGBW Tunable White	- XXXX
		12	12 W/m	RGB3	RGBW (3000K)					

FOS Lighting reserve the right to change any data without notification