


IP68

IK08

24V

5
YR
WARRANTY

TW

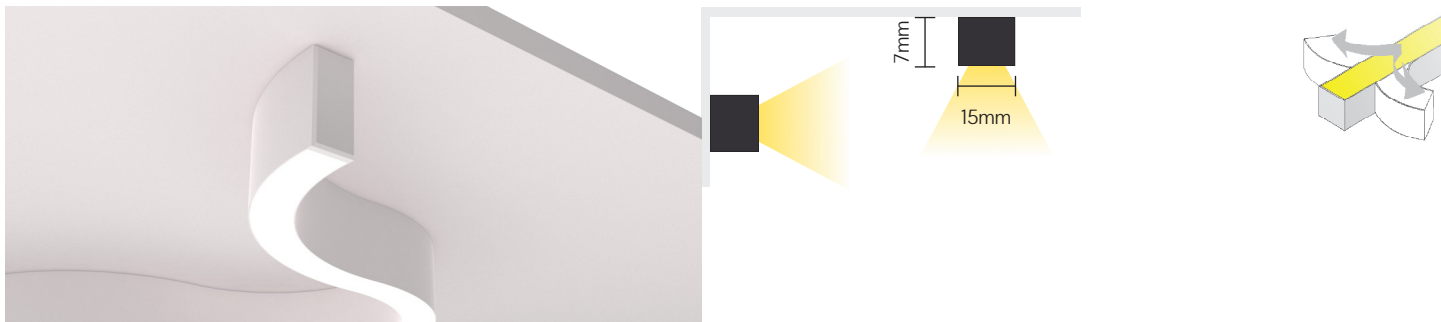

Key Features

- Bend Direction:** Horizontal
- Minium Bend Diameter:** 80mm
- Protection:** IP68 | IK08
- Warranty:** 5 Years
- CRI:** CRI>80, CRI>90*
- CCT:** *2200K, 2700K, 3000K, *3500K, 4000K, *4500K, *5000K, *6500K, RGB, Single Colour, *Tunable White
- Controls:** NonDimming, DALI Dimming, Switch Dim, Casambi
- Power Supply:** Remote Driver
- Power Length:** 600mm
- Wattage:** 5W/m | 10W/m, 12W/m, 13W/m
- Finish Colour:** White Jacket
- Power Entry:** Direct Entry, Side Entry Left or Right, Bottom Entry
- Installation Type:** Surface Mounted
- Input Voltage:** 24V

* MOQ Required

Technical Information

	Wattage (W/m)	Lumens (Lm/m)	Max Run Length (m)	Incremental Order Length (mm)
Monochrome	5	260	13	100
	10	410	10	16.67
RGB	13	R:26 G:76 B:10	5	83.33
		RGB:110		
Tunable White	12	250+280	10	100


Lumens values based on 4000K, CRI>80
If this fitting needs to be adjusted on site, contact FOS Lighting before cutting the product.

Accessories

Standard

Anti-Drop

Photometrics

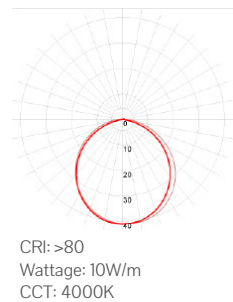

Code

Example: VHB0817-05-80-22-DE-DO-13000

Code	Mounting	Power		CRI		CCT		Connector		Driver		Length
VHB0817	Accessory	05	05 W/m	80	CRI>80	22	2200K	DE	Direct Entry	D0	Non-Dim	- XXXX
		10	10 W/m	90	CRI>90	27	2700K	SL	Side Entry Left	DA	DALI	
						30	3000K	SR	Side Entry Right	SW	Switch-Dim	
						35	3500K	BE	Bottom Entry	CA	Casambi	
						40	4000K			C4	Casambi RGB	
						45	4500K			T2	Tunable White	
		13	13 W/m			50	5000K					
						65	6500K					
						RGB	RGB					
		12	12 W/m			TW	2700K-5700K					

FOS Lighting reserve the right to change any data without notification