




Cyanosis compliant on request

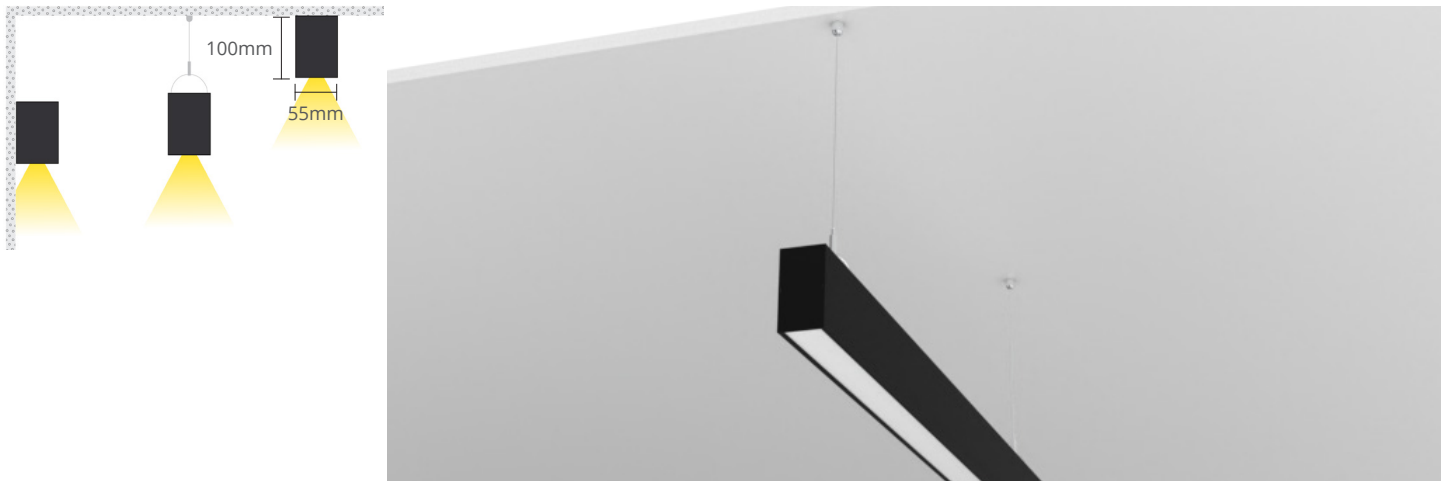

Key Features			
Optical Systems	Opal Diffused Micro Prismatic Frosted Diffuser	CCT	2700K 03000K 3500K 4000K 5000K 6500K Tunable White 2700-6500K
Mounting Type	Wire Pendant Rod Pendant Wall Mounted	Controls	Non Dimming DALI Dimming Switch Dimming Casambi
Finish Options	Textura Black Textura White Anodic Natural Matt Custom colours available by request	Power Supply	Integral
System Warranty	5 Years	Wattage	12W/m 16W/m 20W/m 24W/m 28W/m 32W/m 36W/m 40W/m
CRI	CRI >80 CRI >90	Ingress Protection	IP20 IP55 on request

Finish colour options			
Textura Black	Textura White	Anodic Natural Matt	Custom

Installation Types			
Wire Pendant (P) Rod Pendant (D)	Up/Down Wire (U) Up/Down Rod (Y)	Wall Up & Down Mounted (C)	Wall Mounted (W)




Configurations	
Standard Length	Angle
*Standard Lengths do not include Endcaps, and is only referencing extrusion length.	

Technical Information

	12W/m	16W/m	20W/m	24W/m	28W/m	32W/m	36W/m	40W/m
4000K	1843lm/m	2458lm/m	3072lm/m	3687lm/m	4301lm/m	4916lm/m	5531lm/m	6145lm/m

Lumens values based on Opal, 4000K, CRI>90, both Direct/Indirect


Photometrics

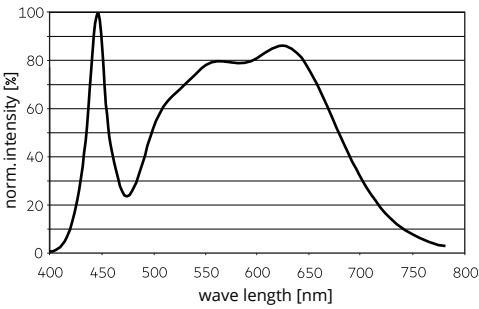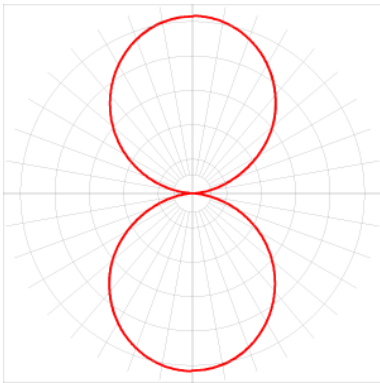

*Mapped CRI data was sourced from LED Manufactureres Data sheets, data shown is based on the LED boards not the luminaire

Accessories

Wire Suspension



Code

Example: V55100-P-12-90-40-OD-D0-10-2800

Code		Mounting		Power		CRI		CCT		Optics		Driver		Finish		Length
V55100 V55100IP	V55100,IP20 V55100, IP55	P	Wire Pendant (Direct)	12	12 W/m	80	CRI>80	27	2700K	OD MF	Opal Micro Prismatic Frosted	D0	Non-Dim	10	Black	- XXXX
		D	Rod Pendant (Direct)	16	16 W/m	90	CRI>90	30	3000K			DA	DALI	11	White	
		U	Wire Pendant (Direct/Indirect)	20	20 W/m			35	3500K			SW	Switch-Dim	75	Anodic	
				24	24 W/m			40	4000K			CA	Casambi		Natural	
		Y	Rod Pendant (Direct/Indirect)	28	28 W/m			50	5000K			T2	Tunable		Matt	
				32	32 W/m			65	6500K				White	CU	Custom	
		W	Wall Mounted (Direct)	36	36 W/m			TW	2700K - 6000K							
		C	Wall Mounted (Direct/Indirect)	40	40 W/m											

FOS Lighting reserve the right to change any data without notification