

SMM160

SURFACE MOUNT LED DOWNLIGHT CAN



Key Features

Optical Systems	15° 23° 35° 55° Beam Angle	CCT	3000K 4000K
Mounting Type	Surface Mount Suspended	Colour Consistency (LED Module)	3 SDCM
Finish Options	White Black	COI Compliant	N/A
Warranty	5 Years	Lumen Output	1165 - 3370lm
CRI	>80	Lifetime	L70, 50,000

Application

Suitable for use in Residential, Commercial and Retail applications.

Design

Manufactured from die cast aluminium with all componentry contained within the conical structure.

Installation

Surface Mount (or Suspended).

Notes

- Data value may change depending on configurations and product availability.
- Adapted with 111mm Light Engine.

SMM160


SURFACE MOUNT LED DOWNLIGHT CAN

Configurations

Product Series	Non Dim Wattage	3000K	4000K	Dimensions (DxH)
SMM160	15	1165lm	1220lm	Ø160 x 177mm
	20	1760lm	1870lm	
	28	2360lm	2510lm	
	38	3150lm	3370lm	


Specifications subject to change without notice.

Photometrics

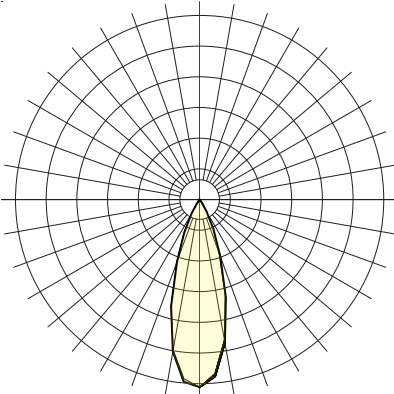

Nominal polar curve
15W, 35°, 4000K

Dimensions

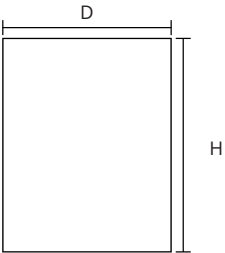

Code

SMM160 / SS / 28 / 40 / 23 / B / DALI

Product Series	Mounting		Wattage		CCT		Beam Angle		Trim Colour		Driver	
SMM160	SM SS	Surface Mount Suspended	15	15W	30 40	3000K 4000K	15	15°	B W	Black White	PD 1-10V DALI	Phase Dimming 1-10V Dimming DALI Dimming
			20	20W			23	23°				
			28	28W			35	35°				
			38	38W			55	55°				