


RDL-LED

LED RADIAL

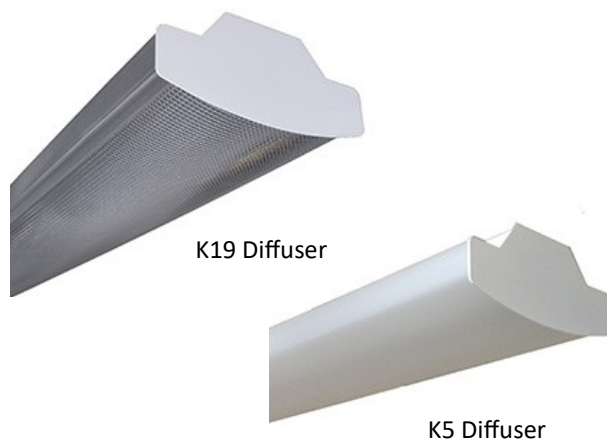

FEATURES

- L80 B10.
- Rated 70,000 hours.
- CRI>80.
- Self cooling, zhaga certified LED boards.
- 10 year warranty (standard TCI).
- Future proof replaceable gear tray.
- Powder coated white metal body - other colours available upon request.
- Available in DALI dim or switch dim.
- Choice of two wrap around diffusers: High transmittance K5 patterned and K19 prismatic diffuser.
- Self hinged lens for ease of cleaning.
- Suitable for fixing directly to ceiling or may be rod suspended.
- Suitable for in-line mounting.



10 Year
Warranty



80 CRI typically
greater than



TECHNICAL INFORMATION

Contact Frend for other lighting configurations
Refer to IES files for System Lumens

Configurations	Non Dim System wattage	Combined Board Output (lm)	Nominal Length (mm)
1x08W	10.6	1220	600
2x08W	22.20	2440	600 & 1200
4x08W	38.10	4880	1200
1x14W	17.62	2200	600
2x14W	34.34	4400	600 & 1200
4x14W	68.52	8800	1200

SPECIFICATIONS

Dimensions (mm)	
	Actual / Nominal
Length	575 / 600
Width	210
Depth	98

PRODUCT CODE

Example code: RDL-LED/4x08/12/K5/40/ND

See Technical Information Table for configurations options.
Specifications subject to change without notice.

Product Series	Number of Boards	Wattage of Boards	Nominal Length	Diffuser type	LED Type	ECG
RDL-LED	1	08	06 600	K19 K19 Prismatic	30 3000K	ND Non Dim
	2	14	12 1200	K5 K5 Reeded Frost	40 4000K	DALI DALI Dim
	4					SD Switch

FREND
lighting

phone 1300 241 087

fax (617) 3272 9000

email sales@foslighting.com.au

PO Box 268

14 Jaybel Street, Salisbury

Brisbane QLD 4107

www.frend.com.au