


RDL-LED

LED RADIAL



K19 Diffuser

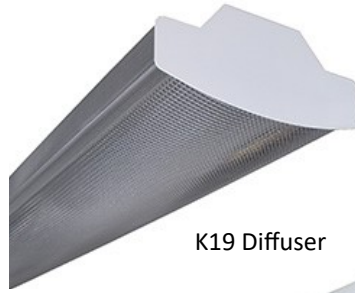

K5 Diffuser

FEATURES

- L80 B10.
 - Rated 70,000 hours.
 - CRI>80.
 - Self cooling, zhaga certified LED boards.
 - 10 year warranty (standard TCI).
 - Future proof replaceable gear tray.
 - Powder coated white metal body - other colours available upon request.
 - Choice of two wrap around diffusers:
- High transmittance K5 patterned and K19 prismatic diffuser.
 - Self hinged lens for ease of cleaning.
 - Suitable for fixing directly to ceiling or may be rod suspended.
 - Suitable for in-line mounting.
 - Available in DALI dim or switch dim.



Year
Warranty



CRI typically
greater than



Zhaga

TECHNICAL INFORMATION

Contact FrenD for other lighting configurations
Refer to IES files for System Lumens

Configurations	Non Dim System wattage	Combined Board Output (lm)	Nominal Length (mm)
1x08W	10.6	1220	600
2x08W	22.20	2440	600 & 1200
4x08W	38.10	4880	1200
1x14W	17.62	2200	600
2x14W	34.34	4400	600 & 1200
4x14W	68.52	8800	1200

SPECIFICATIONS

Dimensions (mm)

	Actual / Nominal
Length	575 / 600 1175 / 1200
Width	210
Depth	98

PRODUCT CODE

Example code: RDL-LED/4x08/12/K5/40/ND

See Technical Information Table for configurations options.
Specifications subject to change without notice.

Product Series	Number of Boards	Wattage of Boards	Nominal Length	Diffuser type	LED Type	ECG
RDL-LED	1	08	06 600	K19 K19 Prismatic	30 3000K	ND Non Dim
	2	14	12 1200	K5 K5 Reeded Frost	40 4000K	DALI DALI Dim
	4					SD Switch Dim