

JUPITER

LOW GLARE LED DOWNLIGHT



FEATURES

- Low Glare LED Downlight.
- Multiple beam spread options available for the 12W and 15W version.
- CRI >80.
- 3000°K and 4000°K available.
- Large range of accessories including round and square, fixed and tiltable (see over).
- DALI dimming option.

Specifications

10W Ø55 x 49mm

12W / 15W Ø55 x 72mm



10W

12W / 15W

TECHNICAL INFORMATION

Specified Wattage (w)	10		12		15	
Colour Temp. (k)	3000	4000	3000	4000	3000	4000
CRI (Ra)	>80		>80		>80	
Light Engine Lumens (lm)	810		960		1350	

PRODUCT CODE

Example code: JUP/12/40/38/A15/ND

Specifications subject to change without notice.

Product Series	Wattage	LED Type	Reflector/ Beam Angle	Accessories / Options			ECG	
JUP	10	30 3000K	10 10°	A1	A6	A11	ND	Non Dim
	12	40 4000K	15 15°	A2	A7	A12	DALI	DALI Dim
	15		24 24°	A3	A8	A13		
			38 38°	A4	A9			
			55 55°	A5	A10			

FREND
lighting

phone 1300 241 087

fax (617) 3272 9000

email sales@foslighting.com.au

PO Box 268


14 Jaybel Street, Salisbury

Brisbane QLD 4107

www.frend.com.au

JUPITER

LOW GLARE LED DOWNLIGHT

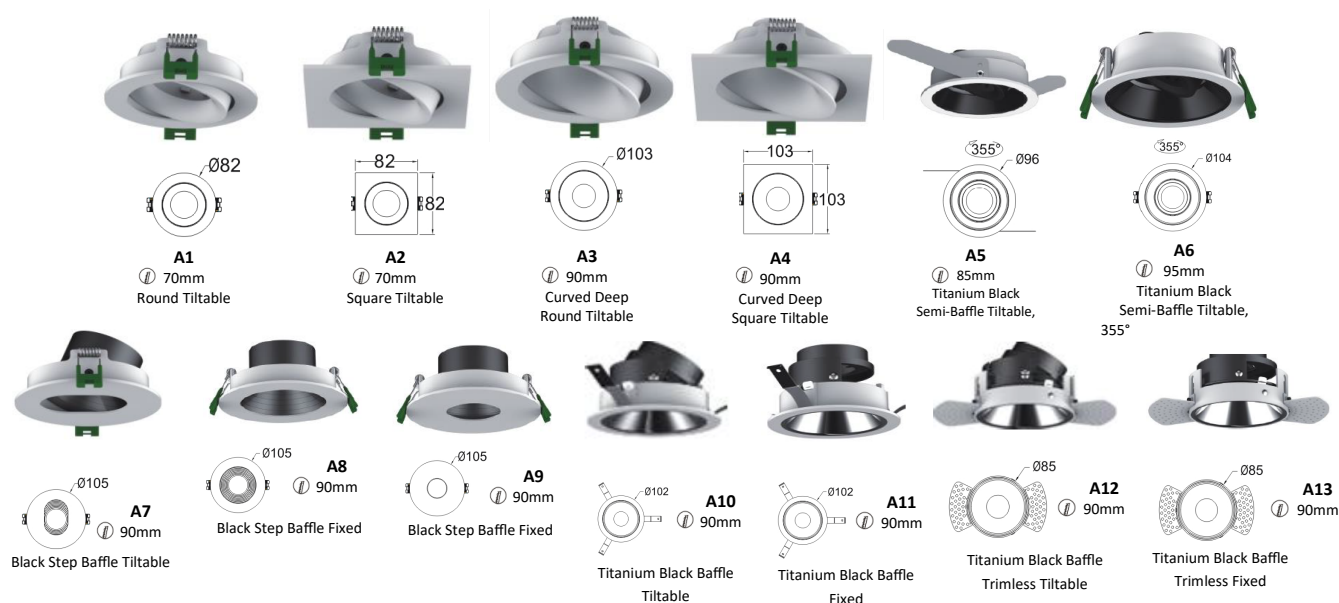

Types A7 to A13:
75 - 76mm cut-out available upon request.

PRODUCT CODE

Example code: JUP/12/40/38/A15/ND

Specifications subject to change without notice.

Product Series	Wattage	LED Type	Reflector/ Beam Angle	Accessories / Options			ECG	
JUP	10	30 3000K	10 10°	A1	A6	A11	ND	Non Dim
	12	40 4000K	15 15°	A2	A7	A12	DALI	DALI Dim
	15		24 24°	A3	A8	A13		
			38 38°	A4	A9			
			55 55°	A5	A10			

FREND
lighting

phone 1300 241 087

fax (617) 3272 9000

email sales@foslighting.com.au

PO Box 268

14 Jaybel Street, Salisbury

Brisbane QLD 4107

www.frend.com.au