

VEKTA V60140

Why Choose V60140

V60100 utilises Zhaga compliant boards in both the direct and indirect lighting options, providing realistic light output. This fitting can be supplied as pendant or wall mounted options to best suit the architectural vision.

Compliance




*Cyanosis compliant on request

Key Features

- Dot free illumination
- Complies with relevant Australian Standards
- Diverse possibilities
- SELV LED Engine
- Screwless end caps (On Request)
- Emergency Options (On Request)
- Manufactured in Australia
- Up to 120 system lumens per system watt

Colour Options



Code

Example:

V60140-C129030ODDO10-2400

Profile	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
V60140	T - Trimless Recessed W - Wall C - Wall Up and Down P/D - Pendant U/Y - Pendant Up and Down	12 - 12 W/m 16 - 16 W/m 20 - 20 W/m 24 - 24 W/m 28 - 28 W/m 32 - 32 W/m 36 - 36 W/m 40 - 40 W/m 44 - 40 W/m 48 - 48 W/m	80 - CRI>80 90 - CRI>90	30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K TW - 2700-6500K	OD - Opal AS - Asymmetric	DO - Non-Dim DA - Dali-Dim SW - Switch-Dim CA - Casambi T2 - Tunable White	10 - Black 11 - White 75 - Gray 79 - Anodised CU - Custom	- XXXX mm


Mounting

Wire Pendant (P)
Rod Pendant (D)

Up/Down Wire (U)
Up/Down Rod (Y)

Wall Up & Down
Mounted (C)

Wall Mounted
(W)

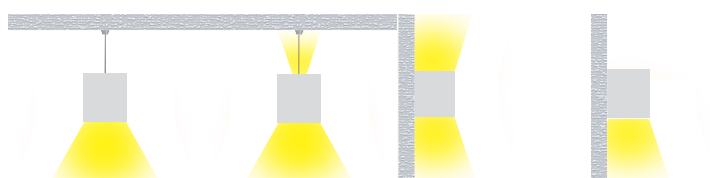

Dimensions

